


FLUO UGRADNA SVJETILJKA S PARABOLIK RASTEROM T8
RECESSED DOUBLE PARABOLIC T8 LUMINAIRES




FLUO UGRADNA SVJETILJKA S OPAL PLOČOM ZA T8 CIJEVI
RECESSED OPAL T8 LUMINAIRES

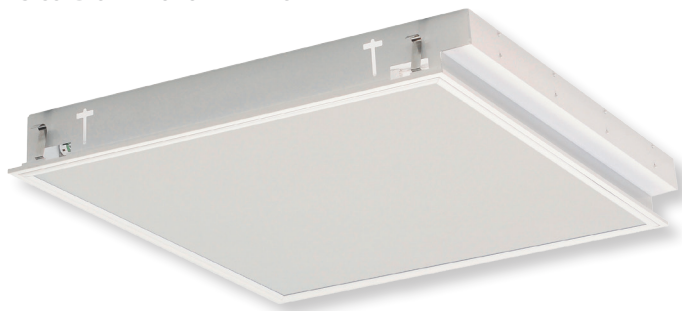

FLUO NADGRADNA SVJETILJKA S PARABOLIČNIM RASTEROM ZA T8 CIJEVI
SURFACE MOUNTED DOUBLE PARABOLIC T8 LUMINAIRES




FLUO NADGRADNA SVJETILJKA S OPAL PLOČOM T8
SURFACE MOUNTED OPAL T8 LUMINAIRES

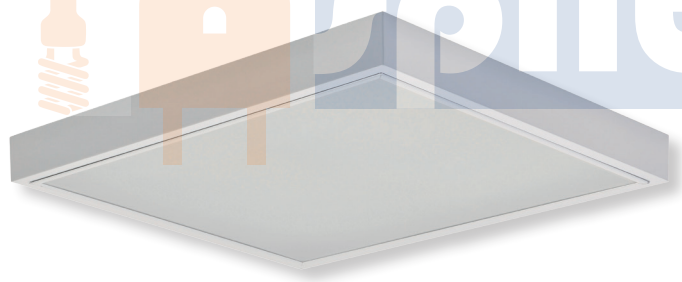

FLUO NADGRADNA VODOTJESNA SVJETILJKA IP66/T8
SURFACE INDUSTRIAL LUMINAIRES IP66



UGRADNI OKRUGLI ZATVORENI DOWNLIGHT RECESSED DOWNLIGHT IP42

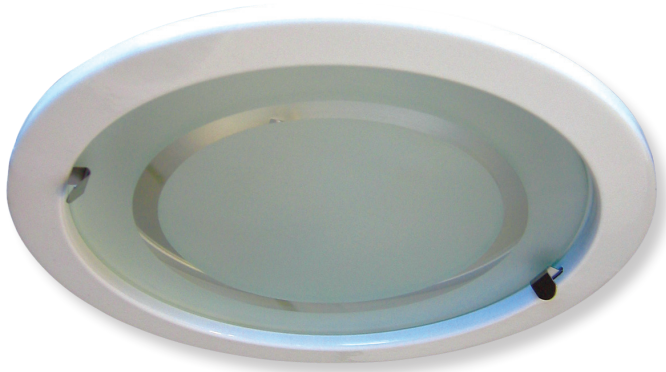

DALZY-G12-56SMD2835 New 56smd 2835 G12 Led Lamp 110V 220V 8W





1. Featuring bright white LED light. G12 socket, low power consumption. Long-lasting life span.
2. Ideal LED bulb replacement for indoor room, market, display window, library lighting, night club, office, landscape, household, cabinet, room mirror etc.
3. Pure color with nice appearance, with slowly Lumens depreciation.
4. Fin housing, bee-hole structure, Better for LED heat dissipation, temperature is 5-6 degree lower than same power and same size tensile lighting
5. Easy installation and can be use again after repairing when there is damage occurred.
6. Durable and non-fading brilliant beams. Immediate on/off response.
7. OEM and ODM service is available.



LED lamp with R7s socket

Model	W	Socket	[lm]	[mm]
DAL-L118-12	12W	R7s	650	34,5x88x118



UMETAK ZA INDUSTRIJSKO ZVONO VISILICE

2014 new high bay light info:

Power: 100W

Input voltage: AC85-265V

Working temperature: -30 ~ 60 °

Storage Temperature: -25 ~ 45 °

Flux: 10000lm

Color temperature: 2700-6500K

CRI: Ra90

Beam angle: 75 °

Dimension: Φ286 * 240 (without stand)

Material: Graphite + PMMA

Weight: 2.8kg (plus packaging)

Lifespan :> 50000h

Protection: IP65



Item No.	Power (W)	Emitting Color (K)	Luminous Flux (lm) (3000-4000K)	Luminous Flux (lm) (5500-6000K)	Voltage (V)	Size (mm)
DALXGY-HB286-50(6000)	50	3000-6000K	5400lm	6000lm	AC100-240	Φ286*320
DALXGY-HB286-60(7000)	60	3000-6000K	6300lm	7000lm	AC100-240	Φ286*320
DALXGY-HB286-80(8000)	80	3000-6000K	7200lm	8000lm	AC100-240	Φ286*320
DALXGY-HB286-100(10000)	100	3000-6000K	9900lm	10000lm	AC100-240	Φ286*320
DALXGY-HB320-150(15000)	150	3000-6000K	13500lm	15000lm	AC100-240	Φ286*320